





RS-301 HIGH SIDE WASHER ELECTRIC OR HYDRAULIC DRIVE

Revised June 15, 2006

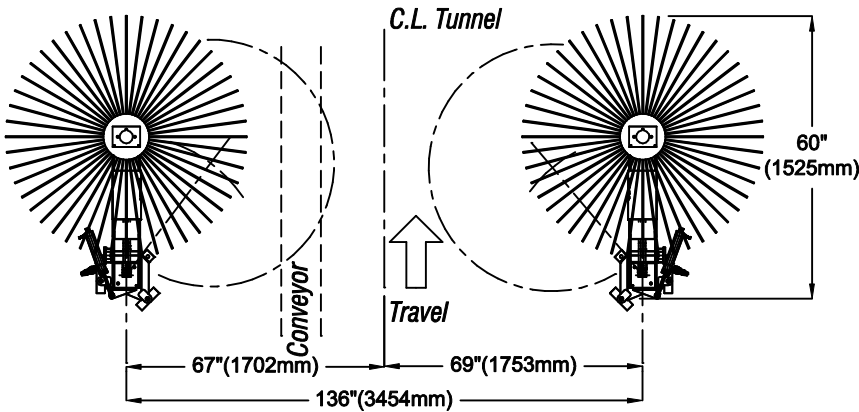

**PLAN VIEW
HIGH SIDE WASHER RS 301**

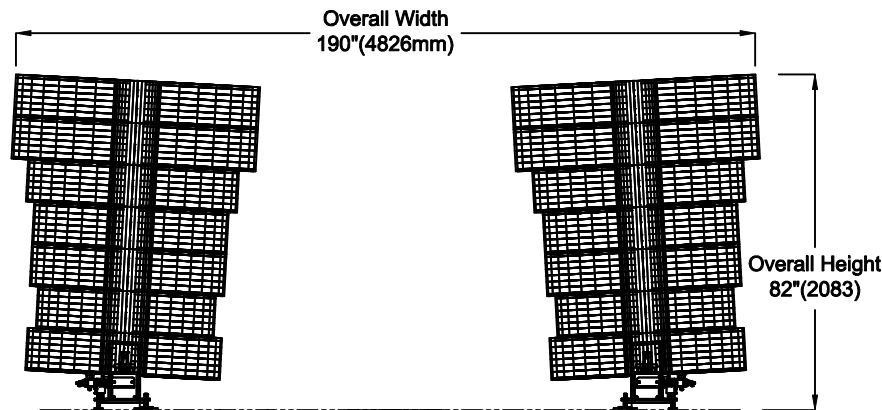

**FRONT VIEW
HIGH SIDE WASHER RS 301**

Features

- Envirosoft 2nd Generation Foam
- Individually Air Controlled Side Pressure
- Electric Drive
- Stainless Steel bearings & Hardware
- Maintenance-Free Pro-Coat Finish, Silver/Gray
- Water Solenoid Valve- Optional Voltage
- One Year Manufacturer Warranty

Options

- Parallel Retract Option
- Staggered Retract Option
- Red or Blue Envirosoft 2nd Generation Foam
- Hydraulic Drive

Technical Data

Water

- 3/4" Line
- 40 PSI (3 BAR) MIN. Pressure
- 4.5 GPM (17 LPM) / Brush

Pneumatics

- 1/4" Line
- 0.5 CFM (0.014 CU.M/MIN)
- 60 PSI (4 BAR)

Electrical

- Retract control / Dema Valve
- 110 VAC Or 24 VAC
- 1 PHASE- 50/60 HZ

Electric Option

Electrical: Motor

- 208/230/460 VAC, 60Hz
- 3 PHASE- 0.9 kW

Electrical: Variable Frequency Drive

- 200 VAC, 60Hz
- Single Phase- 0.75 kW
- Control Voltage - 24 VAC

Hydraulic Option

- 4.5 GPM (17 LPM)
- 800-900 PSI (55-62 BAR)

Specifications Subject To Change. Information Provided is For Reference Only and Is Not To Be Used For Installation Or Construction Purposes. refer To MacNeil Wash Systems Equipment Drawings For Installation Specifications.